

CW982BT305/SW982B
 CW982BT400/SW982B
 TC400CVK-1



Cefiontect



Reduce
The Water



Tornado
Flushing

FEATURES

- 3.0L/4.5L flushing system, low consumption.
- Tornado flushing system makes the best use of water in a strong, clean and quiet way.
- Cefiontect applied. Debris, mold and bacteria being prevented from sticking to ceramic surfaces leads to fewer chemicals and water in cleaning.

SPECIFICS

Size : 700*395*747mm

Nominal water consumption : 3.5L

Dual flush volume: 3.0L/4.5L

Water efficiency grade : Grade1

Drainage mode : Underneath Drainage

Flush type : New Tornado Flush


Rough-in : 305mm/400mm

Water Inlet Requirement :

0.05MPa (Dynamic Pressure) ~ 0.75MPa (Static Pressure)

CW982BT305/SW982B

CW982BT400/SW982B One-piece Toilet

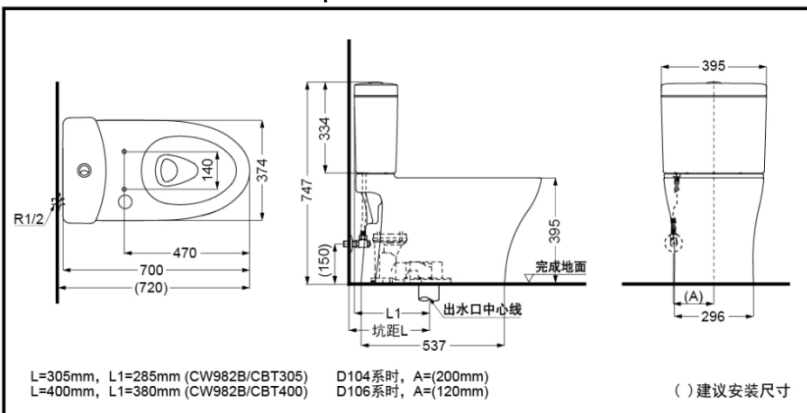

TOTO(CHINA) CO.,LTD. All rights reserved.

OTHERS

Recommend fittings : Washlet TCF791CS