

TOTO



WH142B-162B


FEATURES

- 3.3L/4.8L dual flush design.
- Low water tank, suitable for highly restricted area, mounting panel can be operated on the front or above.
- Fast loading design for tank fittings and panel, more easy for installation and maintenance.

SPECIFICS

Flush Volume: 3.3L/4.8L Water Inlet Requirement: 0.05MPa(Dynamic Pressure) ~0.75MPa(Static Pressure) Water Efficiency Grade: Grade 1

WH142B-162B/WH142B-762B Concealed Flush Tank

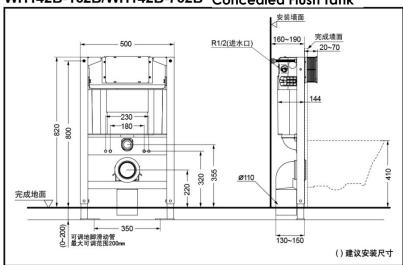

*TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO(CHINA) CO.,LTD. www.toto.com.cn

Others

Recommend fittings:

Tank Panel: MB170Series/ MB174Series/MB176G/ MB171M/MB175M Toilet: CW162B