

Wall Hung Toilet

FEATURES

•3.0L/4.5L dual flush volume, low consumption.

CW822EB

- Cefiontect applied. Debris, mold and bacteria being prevented from sticking to ceramic surfaces leads to fewer chemicals and water in cleaning.
- Tornado flushing system makes the best use of water in a strong, clean and quiet way.












Rimless Cefiontect Tornado

Water Saving

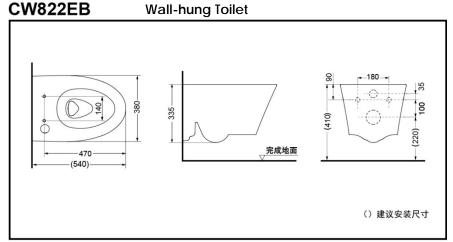

* **TOTO(CHINA) CO.,LTD. All rights reserved.

SPECIFICS

Size: W380xD540xH335mm Nominal Water Consumption:

3.5L

Dual Flush Volume: 3.0L/4.5L Water Efficiency Grade:

Grade1

Flush Type: Tornado Flush Drainage mode: Rear Rough-in: H=220mm Water Inlet Requirement: 0.05MPa(Dynamic

Pressure) ~0.75MPa(Static Pressure)

Others

Recommend Fittings:

Toilet Seat: TC400CVK-1 Concealed Flush Tank:

WH173B-822EB

Tank Panel: MB174P