

TLE23003C1
TLE23003C2
TLE23003C3


FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience




※only with TLE03501B

TLE23003C1+TLE01501B
TLE23003C2+TLE04501B
TLE23003C3+TLE03501B Aqua-auto faucet(single)

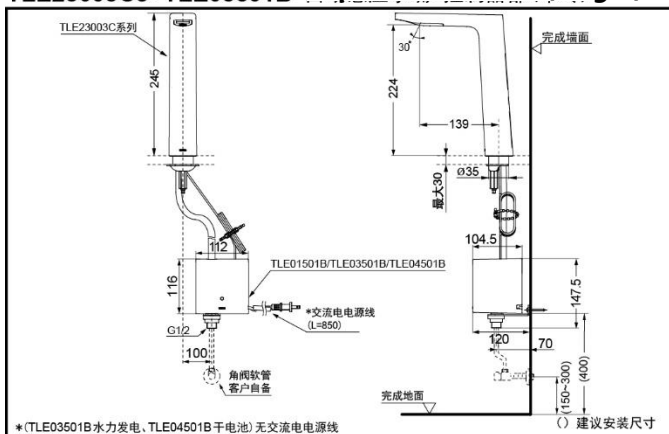

TOTO(CHINA) CO.,LTD. All rights reserved.

TLE23003C1+TLE01501B+TLE05701B
TLE23003C2+TLE04501B+TLE05701B
TLE23003C3+TLE03501B+TLE05701B Aqua-auto faucet(thermal)

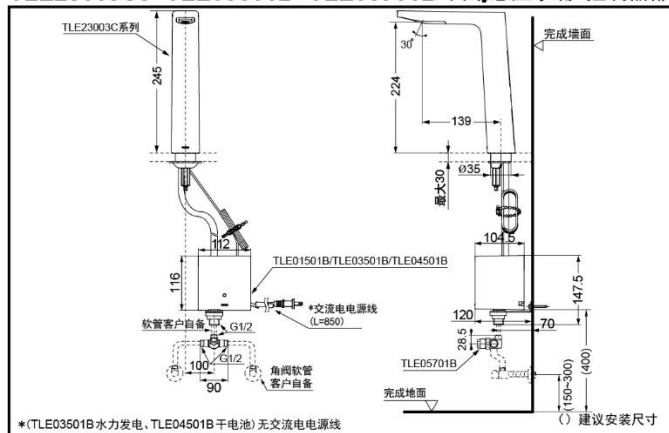

TOTO(CHINA) CO.,LTD. All rights reserved.
 TOTO(CHINA) CO.,LTD. www.toto.com.cn

SPECIFICS

- Water Inlet Requirement:**
 0.05MPa(Dynamic Pressure)
 ~0.75MPa(Static Pressure)
- Water Efficiency:** Grade I
- Drainage accessory:**
 not included
- Operating temperature:**
 1~55°C
- Detection range:** ≤250mm

OTHERS

- Recommend fittings:**
- Functional Part:
 TLE01501B(AC)
 TLE04501B(DC)
 TLE03501B(HYDRO ELECTRIC POWER)
- Thermostatic: TLE05701B