

**TLE24004C1**  
**TLE24004C2**  
**TLE24004C3**



SOFT  
FLOW



WATER  
SAVING




HYDRO  
ELECTRIC  
POWER

※only with TLE03501B

**TLE24004C1+TLE01501B**

**TLE24004C2+TLE04501B**

**TLE24004C3+TLE03501B Aqua-auto faucet(single)**

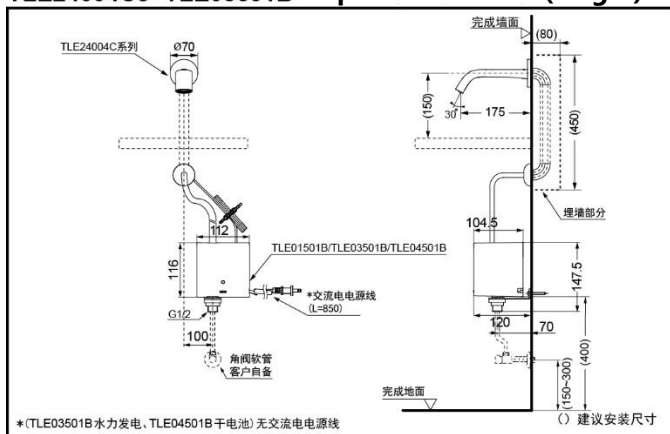

\*(TLE03501B水力发电、TLE04501B干电池) 无交流电源线


( ) 建议安装尺寸

TOTO(CHINA) CO.,LTD. All rights reserved.

**TLE24004C1+TLE01501B+TLE05701B**

**TLE24004C2+TLE04501B+TLE05701B**

**TLE24004C3+TLE03501B+TLE05701B Aqua-auto faucet(thermal)**

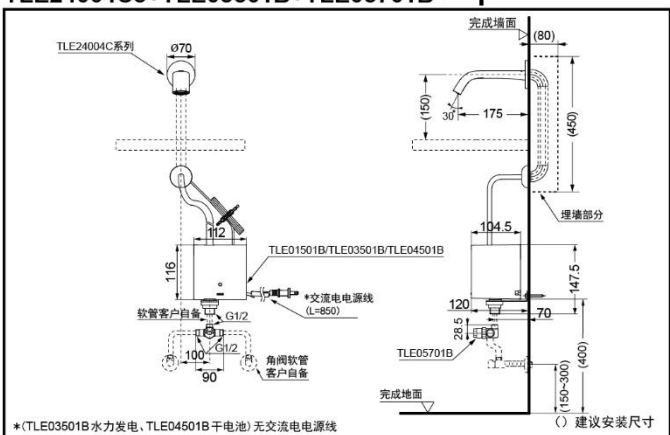

\*(TLE03501B水力发电、TLE04501B干电池) 无交流电源线

( ) 建议安装尺寸

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO(CHINA) CO.,LTD. www.toto.com.cn

### FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience

### SPECIFICCS

- Water Inlet Requirement:  
0.05MPa(Dynamic Pressure)  
~0.75MPa(Static Pressure)
- Water Efficiency: Grade I
- Drainage accessory:  
not included
- Operating temperature:  
1~55°C
- Detection range: ≤250mm

### OTHERS

Recommend fittings:

Functional Part:

TLE01501B(AC)

TLE04501B(DC)

TLE03501B(HYDRO ELECTRIC  
POWER)

Thermostatic: TLE05701B