

PRODUCT SPECIFICATIONS

The high-end LS model brings a sense of elegant luxury, Its beautiful wave-like lines present an elegance that harmonizes with the space, while metallic accents add a glamour that still blends in, and its full-skirted shape creates a sense of luxury.



FEATURES

- The toilet seat has an ergonomic rounded design to ensure comfortable seating.
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces.
- EWATER+® auto-cleans wand, bowl, and under-seat.
- PREMIST® on bowl before each use.
- Ultra high-efficiency dual flush function - 3.8L/3.0L.
- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature.
- Auto lid open/close.
- Auto flush.
- Automatic air deodorizer.
- Heated Seat with Temperature Control.
- Warm Air Dryer function.
- Adjustable spray position.
- Programmable energy saver system.
- Multifunctional horizontal remote control.
- Energy save timer.
- Smooth seam seat design eliminates the gap under the seat.



reddot winner 2022

COMPONENTS

CES8E120KCN

- TCF8E120KCN#W Functional unit
- CS911 T1#NW1 Toilet unit
- HP101T3#00 Drainage connector 305mm
- HP101T4#00 Drainage connector 400mm

COLORS

- Silver (remote control, Body display part)

TECHNOLOGY & INNOVATION HIGHLIGHTS


- | | |
|--|---|
|  EWATER+ for WAND |  CEFIONTECT |
|  EWATER+ for BOWL |  TORNADO FLUSH |
|  EWATER+ for UNDER SEAT |  RIMLESS |
|  AIR-IN WONDER-WAVE |  WATER SAVING |
|  WARM AIR DRYING |  AUTO OPEN/CLOSE LID |
|  HEATED SEAT |  AUTO FLUSH |
|  DEODORIZER |  PREMIST |

CODES/STANDARDS

•Please refer to the label for product standards.

DIMENSIONAL DRAWINGS

CES8E120KCN · NEOREST One-piece Toilet

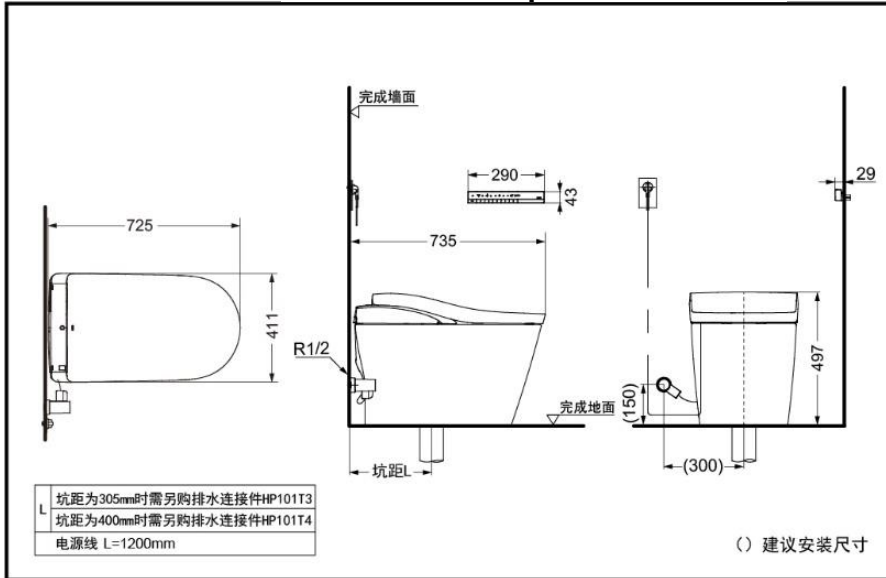

TOTO(CHINA) CO.,LTD. All rights reserved.

SPECIFICATIONS

| CES8E120KCN | |
|-------------|----------------------|
| 额定电源 | AC220V.50Hz |
| 额定功率 | 834W |
| 最大功率 | 1448W<进水温度0° C时> |
| 温水加热方式 | 瞬间式 |
| 电源线长度 | 1.2m |
| 防水保护等级 | IPX4 |
| 水效等级 | 2级 |
| 进水压力 | 最低必要水压: 0.05MPa<流动时> |
| | 最高水压: 0.75MPa<静止时> |
| 进水温度 | 0-35° C |
| 使用温度 | 0-40° C |
| 产品尺寸 | 宽411mm×长725mm×高497mm |
| 产品重量 | 约50kg |

| 便器部 | | |
|-----|-------|----------------|
| 坐便器 | 冲洗水量 | 大3.8L, 小3.0L |
| | 名义冲水量 | 3.3L |
| | 进水方式 | 管道直压与内置水箱储水混合式 |
| | 冲洗方式 | 喷射虹吸式 |
| | 尺寸 | 加长型 |

| 机能部 | | |
|---------|-------------|------------------------|
| 洗净装置 | 喷水量 | 臀部洗净: 0.32-0.43L/min |
| | | 臀部轻柔洗净: 0.32-0.43L/min |
| | | 下身洗净: 0.29-0.43L/min |
| | | 下身护理洗净: 0.35-0.43L/min |
| | 水势调节 | 5档 |
| | 吐水温度 | 温度调节范围: 关, 约30-40° C |
| 加热便座 | 加热器功率 | 1200W |
| | 安全装置 | 温度保险丝 |
| | 防逆流装置 | 真空开关, 止回阀 |
| | 表面温度 | 温度调节范围: 关, 约28-36° C |
| | | 超级自动节电时: 关 |
| | 加热器功率 | 510W |
| 安全装置 | 温度保险丝 | |
| 除臭装置 | 方式 | ○2除臭 |
| | 风量 | 标准模式: 约0.09m³/min |
| | | 强力模式: 约0.16m³/min |
| 功率(耗电量) | 标准模式: 约1.6W | |
| 温风干燥 | 温风温度 | 温度调节范围: 约35-60° C |
| | | 风量 |
| | 加热器功率 | 261W |
| | 安全装置 | 温度保险丝 |

TOTO(CHINA) CO.,LTD. All rights reserved.