

## PRODUCT SPECIFICATIONS

The high-end LS model brings a sense of elegant luxury, Its beautiful wave-like lines present an elegance that harmonizes with the space, while metallic accents add a glamour that still blends in, and its full-skirted shape creates a sense of luxury.

## FEATURES

- The toilet seat has an ergonomic rounded design to ensure comfortable seating.
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces.
- EWATER+® auto-cleans wand, bowl, and under-seat.
- PREMIST® on bowl before each use.
- Ultra high-efficiency dual flush function - 3.8L/3.0L.
- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature.
- Auto lid open/close.
- Auto flush.
- Automatic air deodorizer.
- Heated Seat with Temperature Control.
- Warm Air Dryer function.
- Adjustable spray position.
- Programmable energy saver system.
- Multifunctional horizontal remote control.
- Energy save timer.
- Smooth seam seat design eliminates the gap under the seat.

## COMPONENTS

### CES8G220GCN

- TCF8G220GCN#W Functional unit
- CS911 T3#NW1 Toilet unit
- HP101T3#00 Drainage connector 305mm
- HP101T4#00 Drainage connector 400mm

## COLORS

- Nickel (remote control, Body display part)



reddot winner 2022

## TECHNOLOGY & INNOVATION HIGHLIGHTS


- |                        |                     |
|------------------------|---------------------|
| EWATER+ for WAND       | CEFIONTECT          |
| EWATER+ for BOWL       | TORNADO FLUSH       |
| EWATER+ for UNDER SEAT | RIMLESS             |
| AIR-IN WONDER-WAVE     | WATER SAVING        |
| WARM AIR DRYING        | AUTO OPEN/CLOSE LID |
| HEATED SEAT            | AUTO FLUSH          |
| DEODORIZER             | PREMIST             |

## CODES/STANDARDS

•Please refer to the label for product standards.

### DIMENSIONAL DRAWINGS

CES8G220GCN · NEOREST One-piece Toilet

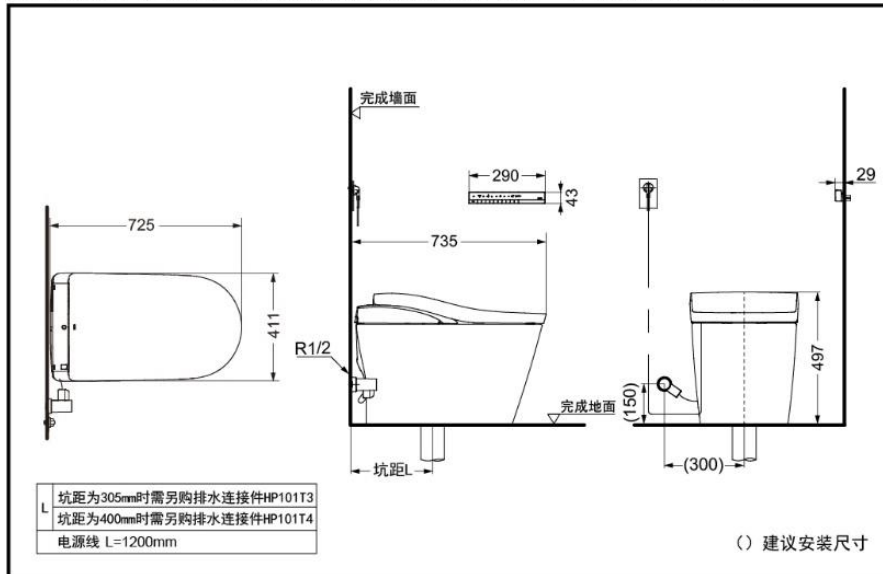

\* TOTO(CHINA) CO.,LTD. All rights reserved.

### SPECIFICATIONS

CES8G220GCN	
额定电源	AC220V.50Hz
额定功率	834W
最大功率	1448W<进水温度0° C时>
温水加热方式	瞬间式
电源线长度	1.2m
防水保护等级	IPX4
水效等级	2级
进水压力	最低必要水压: 0.05MPa<流动时>
	最高水压: 0.75MPa<静止时>
进水温度	0-35° C
使用温度	0-40° C
产品尺寸	宽411mm×长725mm×高497mm
产品重量	约50kg

便器部		
坐便器	冲洗水量	大3.8L, 小3.0L
	名义冲洗水量	3.3L
	进水方式	管道直压与内置水箱储水混合式
	冲洗方式	喷射虹吸式
	尺寸	加长型

机能部		
洗净装置	喷水量	臀部洗净: 0.32-0.43L/min
		臀部轻柔洗净: 0.32-0.43L/min
		下身洗净: 0.29-0.43L/min
		下身护理洗净: 0.35-0.43L/min
	水势调节	5档
	吐水温度	温度调节范围: 关, 约30-40° C
加热便座	加热器功率	1200W
	安全装置	温度保险丝
	防逆流装置	真空开关, 止回阀
	表面温度	温度调节范围: 关, 约28-36° C
		超级自动节电时: 关
	加热器功率	510W
安全装置	温度保险丝	
除臭装置	方式	○2除臭
	风量	标准模式: 约0.09m³/min
		强力模式: 约0.16m³/min
功率(耗电量)	标准模式: 约1.6W	
温风干燥	温风温度	温度调节范围: 约35-60° C
		风量
	加热器功率	261W
	安全装置	温度保险丝

TOTO(CHINA) CO.,LTD. All rights reserved.